


### Power Distribution System Professional PDU



**GOOD ELECTRIC PROPERTIES  
BRASS CASTINGS  
CONNECTION**

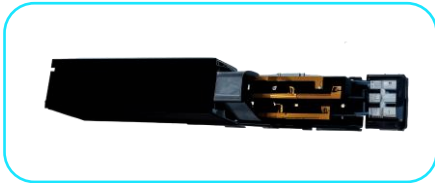

**SN-1U-C8-KG**



**SN-1.5UA-C4E4-KG**



**SN-1U-M7-K**



**SN-1U-E10-K**

4 WAY BRITISH & 4 WAY IEC13	
SIZE	19" horizontal type 1.5UA
DIMENSION	(L x W x H) mm 490 x 66 x 44
VOLTAGE	250V ~ (50-60) HZ
SOCKET	
PLUG	
WAYS	Eight (8)
PROTECTION	Overload
INNER CONNECTOR	Copper strip: (L)48X(W)5X(T)0.8mm
MAX CURRENT	13 A
INPUT METHOD	Single
CONTROL	Double break Switch with Power instruction
MAX LOAD	3500W

7 WAY BRITISH STANDARD	
SIZE	19" horizontal type 1.5UA
DIMENSION	(L x W x H) mm 490 x 66 x 44
VOLTAGE	250V ~ (50-60) HZ
SOCKET	
PLUG	
WAYS	Seven (7)
INNER CONNECTOR	Copper strip: (L)48X(W)5X(T)0.8mm
MAX CURRENT	13 A
INPUT METHOD	Single
CONTROL	Double break Switch with Power instruction
MAX LOAD	3500W

8 WAY IEC-13 STANDARD	
SIZE	19" horizontal type 1.5UA
DIMENSION	(L x W x H) mm 490 x 66 x 44
VOLTAGE	250V ~ (50-60) HZ
SOCKET	
PLUG	
WAYS	Eight (8)
PROTECTION	Overload
INNER CONNECTOR	Copper strip: (L)48X(W)5X(T)0.8mm
MAX CURRENT	13 A
INPUT METHOD	Single
CONTROL	Double break Switch with Power instruction
MAX LOAD	3500W

7-Way 1U Multipurpose STANDARD	
SIZE	19" horizontal type 1.5UA
DIMENSION	(L x W x H) mm 490 x 66 x 44
VOLTAGE	250V ~ (50-60) HZ
SOCKET	
PLUG	
WAYS	Eight (8)
PROTECTION	Overload
INNER CONNECTOR	Copper strip: (L)48X(W)5X(T)0.8mm
MAX CURRENT	13 A
INPUT METHOD	Single
CONTROL	Double break Switch with Power instruction
MAX LOAD	3500W

## Ordering Information

Part No	Name of items	Colour
SN2-1.5UA-E7-K	7-WAY 1.5U BS PDU (13Amp)-19" Rack Mountable	Black
SN-1U-E10-K	10-Way 1.5U BS PDU with High Protection (13Amp)	Black
SN-1U-C8-KG	8-Way 1U IEC13 PDU with High Protection (13Amp)-19" RM	Black
SN-1U-M6-K	6-Way 1U Multipurpose !9 Inch Rack Mount PDU (13Amp) with Switch	Black
SN-1U-M7-K	7-Way 1U Multipurpose !9 Inch Rack Mount PDU (13Amp) with Switch	Black
SN-1.5UA-C4E4-KG	8-Way 1.5U (4-IEC13 + 4-BS) PDU with High Protection (13Amp)-19" RM	Black